

JW-HD144N


N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

445-470W

Cell Type



9BB

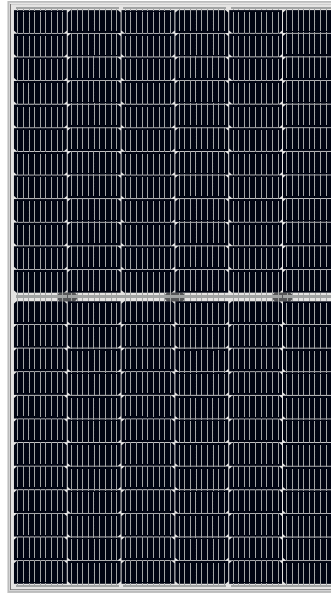

470W

Maximum Power Output

21.59%

Maximum Module Efficiency

0~+5W

Power Output Tolerance



Additional Power Generation Gain

At least **30**-year product life, more than 10%- 30% additional power gain comparing with conventional module



Better Weak Illumination Response

Wide spectral response, higher power output even under low-light settings like smog or cloudy days



ZERO LID (Light Induced Degradation)

N-type solar cell has no LID naturally, can increase power generation



Better Temperature Coefficient

Higher power generation under working conditions, thanks to passivating contact cell technology



Lower LCOE

High bifaciality, high power output, saving BOS cost




Wider Applicability

BIPV, vertical installation, snowfield, high-humid area, windy and dusty area

Jolywood Delivers Reliable Performance Over Time

- Leader of N-type bifacial technology
- Fully automatic facility and world-class technology
- Long term reliability tests passed
- 100% EL tests

Linear Performance Warranty

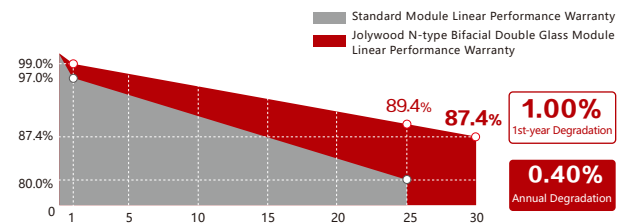

12 Years Product Material & Workmanship 30 Years Linear Performance Warranty

Additional Insurance Backed by Munich Re



JW-HD144N Series

N-type Bifacial High Efficiency Mono Silicon Half-Cell Double Glass Module

Electrical Properties | STC*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	445	450	455	460	465	470
MPP Voltage (Vmp) (V)	41.4	41.6	41.8	42.0	42.2	42.4
MPP Current (Imp) (A)	10.75	10.82	10.89	10.96	11.02	11.09
Open Circuit Voltage (Voc) (V)	49.8	50.0	50.2	50.4	50.6	50.8
Short Circuit Current (Isc) (A)	11.36	11.43	11.50	11.56	11.62	11.69
Module Efficiency (%)	20.44	20.67	20.90	21.13	21.36	21.59

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5
The data above is for reference only and the actual data is in accordance with the practical testing

Electrical Properties | NOCT*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	337	340	344	348	352	356
MPP Voltage (Vmp) (V)	38.8	39.0	39.2	39.4	39.6	39.8
MPP Current (Imp) (A)	8.67	8.72	8.78	8.84	8.88	8.94
Open Circuit Voltage (Voc) (V)	47.6	47.8	48.0	48.2	48.4	48.6
Short Circuit Current (Isc) (A)	9.16	9.22	9.27	9.32	9.37	9.43

*NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

Operating Properties

Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V (IEC)
Maximum Series Fuse Rating(A)	25
Power Tolerance	0~+5W
Bifaciality*	75%

*Bifaciality= $\frac{P_{maxrear}(STC)}{P_{maxfront}(STC)}$, Bifaciality tolerance:±5%

Temperature Coefficient

Temperature Coefficient of Pmax*	-0.320%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Isc	+0.046%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C

*Temperature Coefficient of Pmax±0.03%/°C

Mechanical Properties


Cell Type	166.00mm*83.00mm
Number of Cells	144pcs(12*12)
Dimension	2095mm*1039mm*30mm
Weight	28kg
Front /Rear Glass*	2.0mm/2.0mm
Frame	Anodized Aluminium
Junction Box	IP68 (3 diodes)
Length of Cable*	4.0mm ² , +300mm/-180mm
Connector	MC4 Compatible

*Heat strengthened glass
*Cable length can be customized




With Different Power Generation Gain (regarding 460W as an example)

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	495	42.0	11.77	50.4	12.40
15	512	42.0	12.18	50.4	12.83
20	529	42.0	12.58	50.4	13.25
25	546	42.1	12.99	50.5	13.67
30	564	42.1	13.39	50.5	14.09

Engineering Drawing (unit: mm)

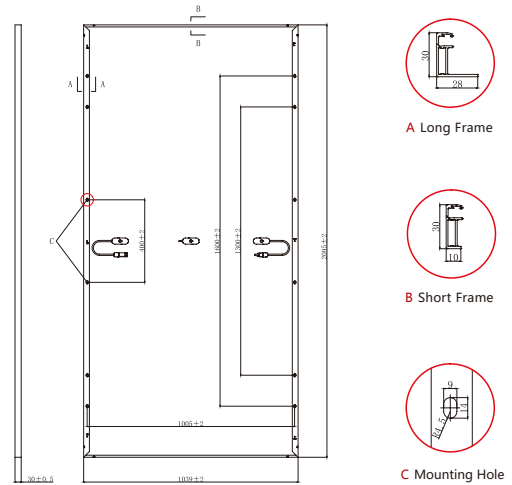

Characteristic Curves | HD144N-460

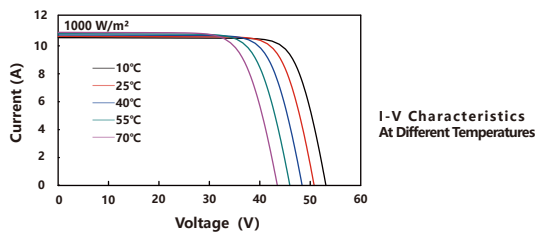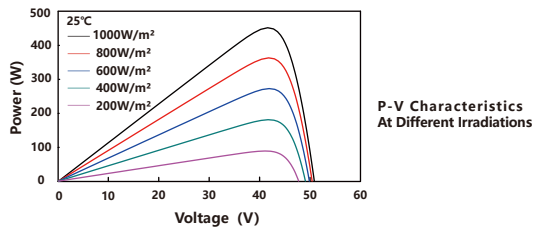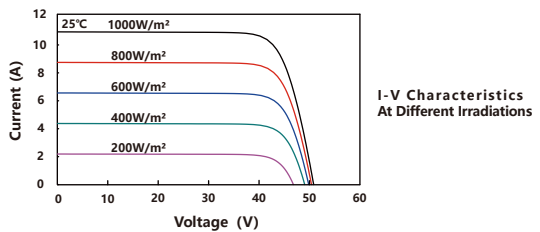

Packaging Configuration

Packing Type	20'GP	40'GP	40'HQ
Piece/Pallet		36	
Pallet/Container	5	11	22
Piece/Container	180	396	792

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.



JOLYWOOD (TAIZHOU) SOLAR TECHNOLOGY CO.,LTD.

Add: No.6 Kaiyang Rd., Jiangyan Economic Development Zone, Taizhou, Jiangsu Province, China, 225500

TEL: +86 523 80612799 Email: mkt@jolywood.cn

DOC.#: TZ-MP-152 REV: F

Version 2021.07 ©Jolywood (Taizhou) Solar Technology Co., Ltd. All rights reserved

www.jolywood.cn

