



# SunPrimo PM060PWI

Multi-Crystalline Photovoltaic Module



Power Range  
250 ~ 270 W<sub>p</sub>



Highly Strengthened Design  
Module complies with advanced loading tests  
to meet 5400 Pa loading requirements



Flammability Test  
Low ignitability ensuring fire safety



PID-Resistance (up to Diamond Level)  
Certified high PID resistance



Resistance to Salt Corrosion and Humidity  
Module complies with IEC 61701: Salt Mist  
Corrosion Testing



Ammonia Test  
Reliable in ammonia rich environment



# SunPrimo PM060PW I (250 ~ 270 W<sub>p</sub>)

## Electrical Data (STC)

	250W	255W	260W	265W	270W
Nominal Power P <sub>N</sub>	250W	255W	260W	265W	270W
Module Efficiency	15.4%	15.7%	16.0%	16.3%	16.6%
Nominal Voltage V <sub>mp</sub> (V)	30.6	30.8	31.2	31.7	31.8
Nominal Current I <sub>mp</sub> (A)	8.17	8.28	8.34	8.36	8.50
Open Circuit Voltage V <sub>oc</sub> (V)	37.4	37.6	37.7	37.9	38.0
Short Circuit Current I <sub>sc</sub> (A)	8.69	8.76	8.83	8.89	8.95
Maximum Tolerance of P <sub>N</sub>	0 / +3%				

\* Above data are the effective measurement at Standard Test Conditions (STC)  
 \* STC: irradiance 1000 W/m<sup>2</sup>, spectral distribution AM 1.5, temperature 25 ± 2 °C, in accordance with EN 60904-3

## Electrical Data (NOCT)

	184W	188W	192W	196W	199W
Nominal Power P <sub>N</sub>	184W	188W	192W	196W	199W
Nominal Voltage V <sub>mp</sub> (V)	28.1%	28.3%	28.7%	29.2%	28.1%
Nominal Current I <sub>mp</sub> (A)	6.55	6.64	6.69	6.70	7.10
Open Circuit Voltage V <sub>oc</sub> (V)	34.7	34.9	35.0	35.2	36.0
Short Circuit Current I <sub>sc</sub> (A)	7.07	7.12	7.18	7.22	7.66

\* Above data are the effective measurement at Normal Operation Cell Temperature (NOCT)  
 \* NOCT: irradiance 800 W/m<sup>2</sup>, AM 1.5, air temperature 20 °C, wind speed 1 m/s

## Temperature Coefficient

NOCT	46 ± 2 °C
Typ. Temperature Coefficient of P <sub>N</sub>	-0.39% / K
Typ. Temperature Coefficient of V <sub>oc</sub>	-0.30% / K
Temperature Coefficient of I <sub>sc</sub>	0.07% / K

## Mechanical Characteristics

Dimensions (L x W x H)	1640 x 992 x 40 mm (64.57 x 39.05 x 1.57 in)*
Weight	18.5 kg (40.79 lbs)
Front Glass	High transparent solar glass (tempered), 3.2 mm (0.13 in)
Cell	60 multicrystalline solar cells
Back Sheet	Composite film
Frame	Anodized aluminum frame
Junction Box	IP-68 rated with 3 bypass diodes
Connector Type	MC4 KST4/KBT4: 1 x 4 mm <sup>2</sup> (0.04 x 0.16 in <sup>2</sup> )

\* Module Dimension (L x W) Tolerance: ± 2 mm (0.079 in)

## Operating Conditions

Operating Temperature	-40 ~ +85 °C
Ambient Temperature Range	-40 ~ +45 °C
Max. System Voltage	1000 V / 1500 V
Serial Fuse Rating	15 A
Max. Snow / Wind Load	5400 Pa / 2400 Pa
Max. Dynamic Mechanical Load	4000 Pa

## Warranties and Certifications

Product Warranty	Maximum 12 years for material and workmanship
Performance Guarantee	Guaranteed linear degradation to 80% for 25 years *1
Certifications	According to IEC/EN 61215, IEC/EN 61730 and UL 1703 guidelines *2


\*1: Please refer to warranty letter for detail

\*2: Please confirm other certifications with official dealers


## Packing Configuration

Container	20' GP	40' GP	40' HQ
Pieces per Pallet	26	26	26
Pallets per Container	6	14	28
Pieces per Container	156	364	728


## Dimensions mm (inch)

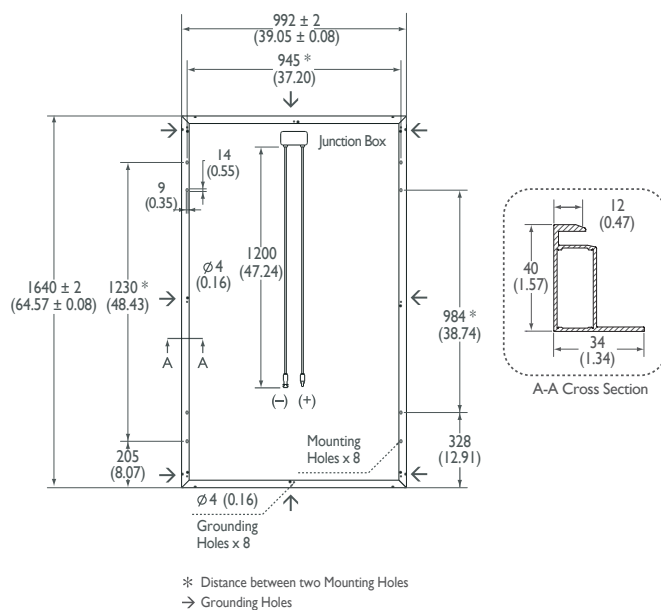

## I-V Curve

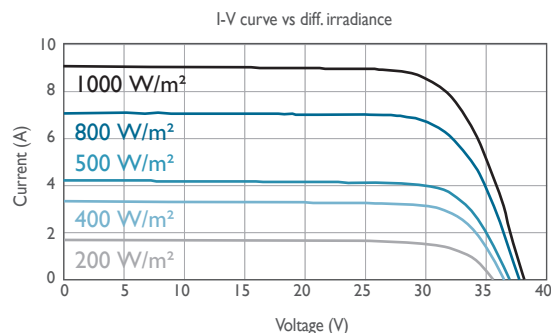

Current/voltage characteristics with dependence on irradiance and module temperature.



### About AU Optronics

AU Optronics (AUO) is a leading global manufacturer of TFT-LCD committed to providing green solutions to its worldwide customers in a manner that is sustainable and friendly to the environment. In addition to its strengths in product and technological innovation, AUO stresses its commitment to going green and to utilizing manufacturing excellence to develop high efficiency solar solutions for residential, commercial, and utility segments.



### AU Optronics Corporation

No. 1, Li-Hsin Rd. 2, Hsinchu Science Park, Hsinchu 30078, Taiwan  
 Tel: +886-3-500-8899 solar.AUO.com

© Copyright August 2017 AU Optronics Corp. All rights reserved. Information may change without notice. This datasheet is printed with Soy Ink.