


## HIGH PERFORMANCE SOLAR PANELS

# REC PEAK ENERGY SERIES

REC Peak Energy Series panels are the perfect choice for building solar systems that combine long lasting product quality with reliable power output.

REC combines leading standards of design and manufacturing to produce high-performance solar panels with uncompromising quality.



**MORE POWER  
PER M<sup>2</sup>**



**ROBUST AND  
DURABLE DESIGN**




**ENERGY PAYBACK  
TIME OF ONE YEAR**



**OPTIMIZED FOR ALL  
SUNLIGHT CONDITIONS**

# REC PEAK ENERGY SERIES

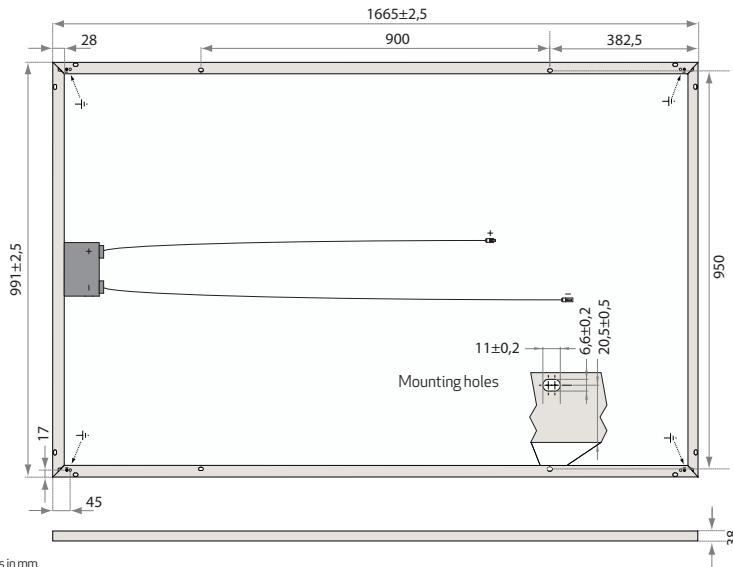

Measurements in mm.

ELECTRICAL DATA @ STC	REC240PE	REC245PE	REC250PE	REC255PE	REC260PE	REC265PE
Nominal Power - $P_{MPP}$ (Wp)	240	245	250	255	260	265
Watt Class Sorting - (W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Nominal Power Voltage - $V_{MPP}$ (V)	29.7	30.1	30.2	30.5	30.7	30.9
Nominal Power Current - $I_{MPP}$ (A)	8.17	8.23	8.30	8.42	8.50	8.58
Open Circuit Voltage - $V_{OC}$ (V)	36.8	37.1	37.4	37.6	37.8	38.1
Short Circuit Current - $I_{SC}$ (A)	8.75	8.80	8.86	8.95	9.01	9.08
Panel Efficiency (%)	14.5	14.8	15.1	15.5	15.8	16.1

Analysed data demonstrates that 99.7% of modules produced have current and voltage tolerance of  $\pm 3\%$  from nominal values. Values at standard test conditions STC (airmass AM1.5, irradiance 1000 W/m<sup>2</sup>, cell temperature 25°C). At low irradiance of 200 W/m<sup>2</sup> (AM1.5 and cell temperature 25°C) at least 97% of the STC module efficiency will be achieved.

ELECTRICAL DATA @ NOCT	REC240PE	REC245PE	REC250PE	REC255PE	REC260PE	REC265PE
Nominal Power - $P_{MPP}$ (Wp)	183	187	189	193	197	202
Nominal Power Voltage - $V_{MPP}$ (V)	27.7	28.1	28.3	28.5	29.0	29.4
Nominal Power Current - $I_{MPP}$ (A)	6.58	6.64	6.68	6.77	6.81	6.90
Open Circuit Voltage - $V_{OC}$ (V)	34.4	34.7	35.0	35.3	35.7	36.0
Short Circuit Current - $I_{SC}$ (A)	7.03	7.08	7.12	7.21	7.24	7.30

Nominal operating cell temperature NOCT (800 W/m<sup>2</sup>, AM1.5, windspeed 1 m/s, ambient temperature 20°C).

## CERTIFICATIONS



**take way**  
for an easy way  
take-e-way WEEE Compliant  
Recycling scheme

## WARRANTY

10 year product warranty  
25 year linear power output warranty  
(max. degradation in performance of 0.7% p.a.)  
See warranty conditions for further details.

**16.1%** EFFICIENCY  
**10** YEAR PRODUCT WARRANTY  
**25** YEAR LINEAR POWER OUTPUT WARRANTY

## TEMPERATURE RATINGS

Nominal operating cell temperature (NOCT) 45.7°C ( $\pm 2^\circ\text{C}$ )  
Temperature coefficient of  $P_{MPP}$  -0.40 %/°C  
Temperature coefficient of  $V_{OC}$  -0.27 %/°C  
Temperature coefficient of  $I_{SC}$  0.024 %/°C

## GENERAL DATA

Cell type: 60 REC PE multi-crystalline  
3 strings of 20 cells with bypass diodes  
Glass: 3.2 mm solar glass with anti-reflection surface treatment  
Back sheet: Double layer highly resistant polyester  
Frame: Anodized aluminum (silver)  
Junction box: IP67 rated  
4 mm<sup>2</sup> solar cable, 0.9 m + 1.2 m  
Connectors: Multi-Contact MC4 (4 mm<sup>2</sup>)  
Origin: Made in Singapore

## MAXIMUM RATINGS

Operational temperature: -40 ... +85°C  
Maximum system voltage: 1000 V  
Maximum snow load: 550 kg/m<sup>2</sup> (5400 Pa)  
Maximum wind load: 244 kg/m<sup>2</sup> (2400 Pa)  
Max series fuse rating: 25 A  
Max reverse current: 25 A

## MECHANICAL DATA

Dimensions: 1665 x 991 x 38 mm  
Area: 1.65 m<sup>2</sup>  
Weight: 18 kg

**Note!** Specifications subject to change without notice.

REC is a leading global provider of solar energy solutions. With more than 15 years of experience, we offer sustainable, high performing products, services and investments for the solar industry. Together with our partners, we create value by providing solutions that better meet the world's growing energy needs. REC is headquartered in Norway and listed on the Oslo Stock Exchange (ticker: RECSOL). Our 1,600 employees worldwide generated revenues of USD 647 million in 2013.



www.recgroup.com

