



Solar inverter

TRIO-20.0/27.6-TL-OUTD

The TRIO 20.0/27.6 commercial inverter offers more flexibility and control to installers who have installations with varying configurations and orientations.

From 20.0 to 27.6 kW



Iris Hellas
Technology Innovations
www.irishellas.com

The dual input section featuring two independent Maximum Power Point Tracking (MPPT), allows optimal energy harvesting from two sub-arrays oriented in different directions.

The TRIO features a high speed and precise MPPT algorithm for real power tracking and improved energy harvesting.

High efficiency at all output levels

Flat efficiency curves ensure high efficiency at all output levels guaranteeing consistent and stable performance across the entire input voltage and output power range.


This device has an efficiency rating of up to 98.2%.

The very wide input voltage range makes the inverter suitable for installations with reduced string length.

Highlights

- True three-phase bridge topology for DC/AC output converter
- Transformerless topology
- Each inverter is set on specific grid codes which can be selected upon commissioning
- Detachable wiring box to allow an easy installation
- Wide input voltage range
- Integrated string combiner with different configurations which include DC and AC disconnect switch in compliance with international standards (-S2, -S1J, -S2J, -S2F and -S2X versions)
- Natural convection cooling for maximum reliability
- Outdoor enclosure for operation use under any environmental conditions
- Capability to connect external sensors for monitoring environmental conditions
- Availability of auxiliary DC output voltage (24 V, 300 mA)
- VSN300 Wifi Logger Card enables wireless access to Aurora Vision with DC input channel monitoring
- Lifetime free of charge access to Aurora Vision

TRIO-20.0/27.6-TL-OUTD string inverter block diagram

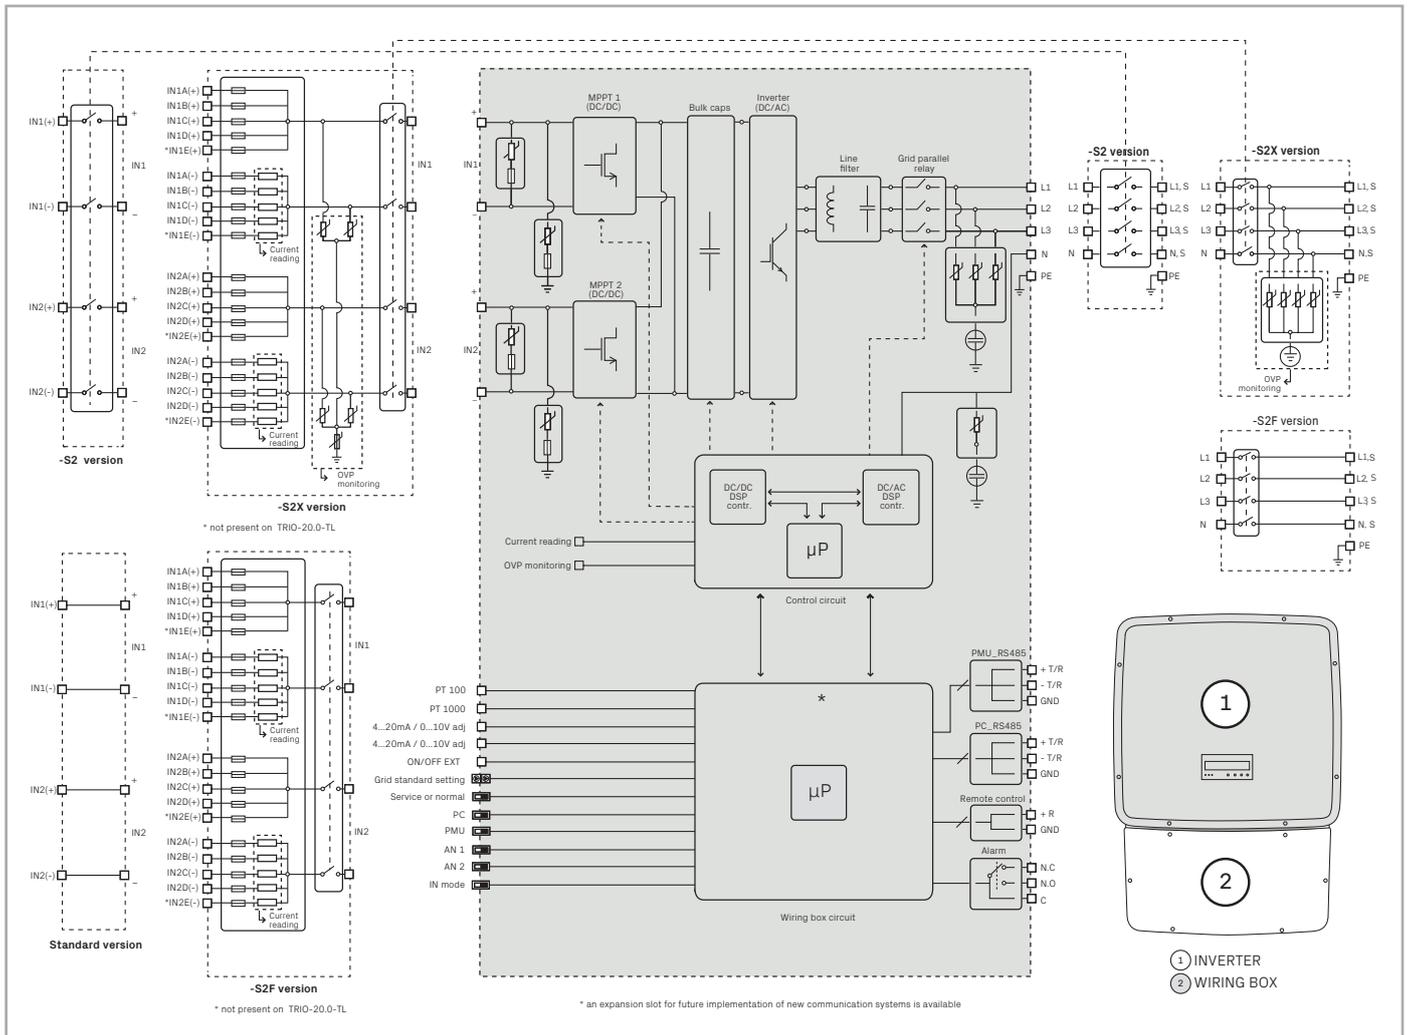

* not present on TRIO-20.0-TL

* an expansion slot for future implementation of new communication systems is available

Technical data and types

Type code	TRIO-20.0-TL-OUTD	TRIO-27.6-TL-OUTD
Input side		
Absolute maximum DC input voltage ($V_{max,abs}$)		1000 V
Start-up DC input voltage (V_{start})		430 V (adj. 250...500 V)
Operating DC input voltage range ($V_{dcmi}...V_{dcmax}$)		$0.7 \times V_{start}...950$ V (min 200 V)
Rated DC input voltage (V_{dcr})		620 V
Rated DC input power (P_{dcr})	20750 W	28600 W
Number of independent MPPT		2
Maximum DC input power for each MPPT ($P_{MPPTmax}$)	12000 W	16000 W
DC input voltage range with parallel configuration of MPPT at P_{dcr}	440...800 V	500...800 V
DC power limitation with parallel configuration of MPPT	Linear derating from max to null [$800 V \leq V_{MPPT} \leq 950$ V]	
DC power limitation for each MPPT with independent configuration of MPPT at P_{dcr} , max unbalance example	12000 W [$480 V \leq V_{MPPT} \leq 800$ V] the other channel: $P_{dcr} = 12000$ W [$350 V \leq V_{MPPT} \leq 800$ V]	16000 W [$500 V \leq V_{MPPT} \leq 800$ V] the other channel: $P_{dcr} = 16000$ W [$400 V \leq V_{MPPT} \leq 800$ V]
Maximum DC input current ($I_{dcr,max}$) / for each MPPT ($I_{MPPTmax}$)	50.0 A / 25.0 A	64.0 A / 32.0 A
Maximum input short circuit current for each MPPT	30.0 A	40.0 A
Number of DC input pairs for each MPPT	1 (4 in -S2X, -S2F, -S1J, -S2J versions)	1 (5 in -S2X and -S2F versions, 4 in -S1J and -S2J)
DC connection type	PV quick fit connector ¹⁾ / Screw terminal block on Standard and -S2 versions	
Input protection		
Reverse polarity protection		Yes, from limited current source
Input over voltage protection for each MPPT - varistor		Yes, 4
Input over voltage protection for each MPPT - plug In modular surge arrester (-S2X, -S1J and -S2J versions)		-S2X: Type 2; -S1J, -S1J: Type 1+2
Photovoltaic array isolation control		According to local standard
DC switch rating for each MPPT (version with DC switch)		40 A / 1000 V
Fuse rating (versions with fuses)		15 A / 1000 V
Output side		
AC grid connection type	Three-phase 3W+PE or 4W+PE	
Rated AC power ($P_{acr} @ \cos\phi=1$)	20000 W	27600 W
Maximum AC output power ($P_{acmax} @ \cos\phi=1$)	22000 W ²⁾	30000 W ³⁾
Maximum apparent power (S_{max})	22200 VA ⁴⁾	30670 VA ⁴⁾
Rated AC grid voltage (V_{acr})		400 V
AC voltage range		$320...480$ V ⁵⁾
Maximum AC output current ($I_{ac,max}$)	33.0 A	45.0 A
Contributory fault current	35.0 A	46.0 A
Rated output frequency (f_r)		50 Hz / 60 Hz
Output frequency range ($f_{min}...f_{max}$)		$47...53$ Hz / $57...63$ Hz ⁶⁾
Nominal power factor and adjustable range	> 0.995 , adj. ± 0.9 with $P_{acr} = 20.0$ kW, ± 0.8 with max 22.2 kVA	> 0.995 , adj. ± 0.9 with $P_{acr} = 27.6$ kW, ± 0.8 with max 30 kVA
Total current harmonic distortion		$< 3\%$
AC connection type		Screw terminal block, cable gland PG36
Output protection		
Anti-islanding protection		According to local standard
Maximum external AC overcurrent protection	50.0 A	63.0 A
Output overvoltage protection - varistor		4
Output overvoltage protection - plug in modular surge arrester (-S2X version)		4 (Type 2)
Operating performance		
Maximum efficiency (η_{max})		98.2%
Weighted efficiency (EURO/CEC)		98.0% / 98.0%
Feed in power threshold		40 W
Night consumption		< 0.6 W
Communication		
Wired local monitoring		PVI-USB-RS232_485 (opt.)
Remote monitoring		VSN300 Wifi Logger Card (opt.), VSN700 Data Logger (opt.)
Wireless local monitoring		VSN300 Wifi Logger Card (opt.)
User interface		Graphic display

Technical data and types


Type code	TRIO-20.0-TL-OUTD	TRIO-27.6-TL-OUTD
Environmental		
Ambient temperature range	-25...+60°C / -13...140°F with derating above 45°C/113°F	
Relative humidity	0...100% condensing	
Sound pressure level, typical	50 dBA @ 1 m	
Maximum operating altitude without derating	2000 m / 6560 ft	
Physical		
Environmental protection rating	IP65	
Cooling	Natural	
Dimension (H x W x D)	1061 mm x 702 mm x 292 mm / 41.7" x 27.6" x 11.5"	
Weight	< 70.0 kg / 154.3 lbs (Standard version)	< 75.0 kg / 165.4 lbs (Standard version)
Mounting system	Wall bracket	
Safety		
Isolation level	Transformerless	
Marking	CE (50 Hz only), RCM	
Safety and EMC standard	EN 50178, IEC/EN 62109-1, IEC/EN 62109-2, AS/NZS 3100, AS/NZS 60950.1, EN 61000-6-2, EN 61000-6-3, EN 61000-3-11, EN 61000-3-12	
Grid standard (check your sales channel for availability)	CEI 0-21, CEI 0-16, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G59/3, C10/11, EN 50438 (not for all national appendices), RD 1699, RD 413, RD 661, P.O. 12.3, AS 4777, BDEW, NRS-097-2-1, MEA, IEC 61727, IEC 62116, Ordinal 30/2013, VFR 2014	
Available products variants		
Standard	TRIO-20.0-TL-OUTD-400	TRIO-27.6-TL-OUTD-400
With DC+AC switch	TRIO-20.0-TL-OUTD-S2-400	TRIO-27.6-TL-OUTD-S2-400
With DC+AC switch and fuse	TRIO-20.0-TL-OUTD-S2F-400	TRIO-27.6-TL-OUTD-S2F-400
With DC+AC switch, fuse and surge arrester	TRIO-20.0-TL-OUTD-S2X-400	TRIO-27.6-TL-OUTD-S2X-400
With DC+AC switch, fuse and 1 DC surge arrester Type 1 + 2	TRIO-20.0-TL-OUTD-S1J-400	TRIO-27.6-TL-OUTD-S1J-400
With DC+AC switch, fuse and 2 DC surge arrester Type 1 + 2	TRIO-20.0-TL-OUTD-S2J-400	TRIO-27.6-TL-OUTD-S2J-400

- 1) Please refer to the document "String inverters – Product manual appendix" available at www.fimer.com for information on the quick-fit connector brand and model used in the inverter
- 2) Limited to 20000 W according to country specific regulations
- 3) Limited to 27600 W according to country specific regulations


- 4) Due to country specific regulations this value can be limited to 22000VA/30000VA
- 5) The AC voltage range may vary depending on specific country grid standard
- 6) The Frequency range may vary depending on specific country grid standard

Remark. Features not specifically listed in the present data sheet are not included in the product

Efficiency curves of TRIO-20.0-TL-OUTD

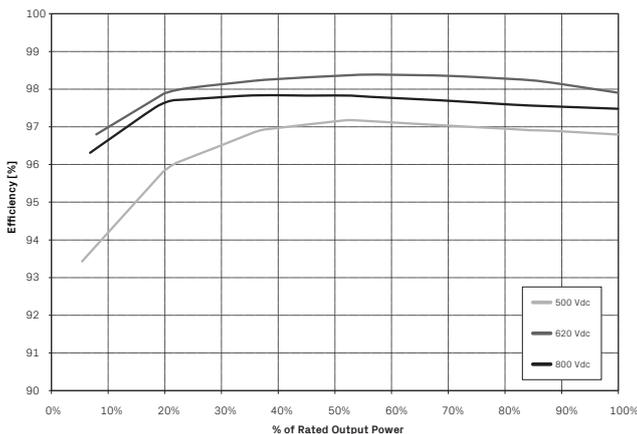

Efficiency curves of TRIO-27.6-TL-OUTD

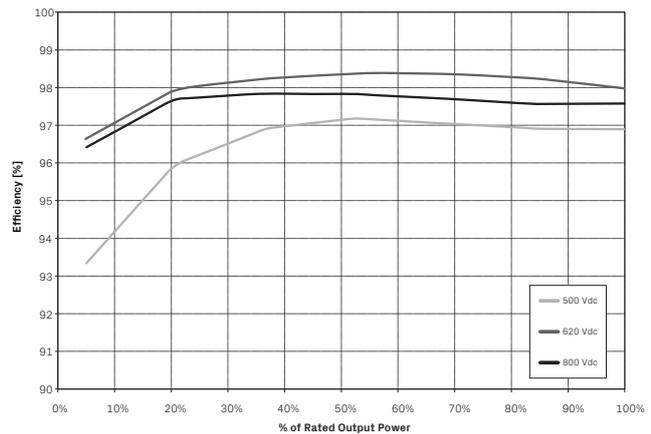

For more information please contact your local FIMER representative or visit:

fimer.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. FIMER does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.



Iris Hellas
Technology Innovations
www.irishellas.com

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of FIMER. Copyright© 2020 FIMER. All rights reserved.

