


Monobloc Heat Pump standard version




Specifications		Aquapura Monobloc 300i / 300esm
Nominal Capacity	l	295
Thermal Power	W	3000
Power Consumption (Med/Max)	W	830
Maximum Temperature	°C	70
Max. Amount of water at 40°C in a run	l	370/403
Maximum Operation Pressure	bar	6
Sound Power Level	dB	48
Electrical back-up power	W	3000
Gross Weight of Unit (Stainless/Enamelled)	Kg	124/145
Electrical Supply	V/Hz	230/50

**EFFICIENT LOW-COST SOLUTION
EASY INSTALL**

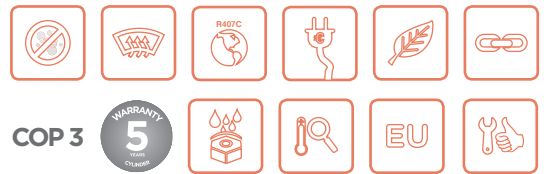

Technical drawing

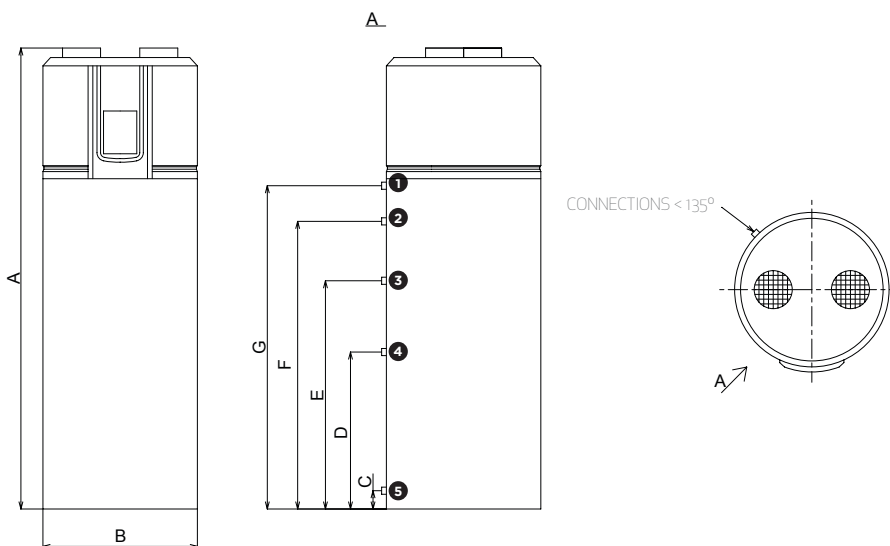

Dimensions	Aquapura Monobloc 300i / 300esm
A	1915
B	650
C	77
D	757
E	1071
F	1157
G	1300
1 (Hot water)	1" Male
2 (PT valve)	1/2" Female
3 (Anode)	1 1/4" Female
4 (Recirculation)	3/4" Male
5 (Cold water)	3/4" Male
6 (Coil Inlet)	-
7 (Coil Outlet)	-

Ducts not included - Includes filter where air enters the unit
With dielectric threads for water connections