

**HIGH PERFORMANCE 72 CELL MONOCRYSTALLINE
SOLAR PHOTOVOLTAIC MODULE**

CNPV-325M, CNPV-320M, CNPV-315M, CNPV-310M

**Optimal Premium
Series by**

CNPV^{POWER}

MOREPOWER

3% Positive Tolerance

CNPV's positive tolerance on label rating power provides higher kWh for money invested.

ARC Glass

Low iron, anti reflective coated glass gives 2% Energy gain.

Cell&Module Matching

Matching gives 2% additional power gain measured at STC conditions.

Independent Performance Verification

Independently verified by Photon and Öko-Test as amongst the best kWh/kWp output worldwide.

100% Electro Luminescence

EL screening provides defect free modules.

Accredited ammonia/salt mist resistance

Long life in marine and high pollution environments.

International Bankability

Pre-approved with financial institutions and rapid capability ensures customers' cost of project is reduced.

**ISO9001
ISO14001
OHSAS18001**

Audited controls for high value consistency.

FORLONGER

True Linear Warranty 25 years

Highest power warranty coverage available on a linear basis.

Workmanship Warranty 10 years

10 years global workmanship warranty.

Strength 5400Pa

Industry leading snow loading capacity.

Degradation Resistance

Superior resistance to PID.

Low Carbon Footprint

One of the lowest carbon footprints over 100 years life cycle.

Green Credentials


Fully committed to recycling during production and end of product life, a dedicated member of PV cycle.

Eco Friendly Packaging

Friendly materials choice with high density packing.

ISO14001 accredited ISO

Continuous improvement in reducing environmental impact.

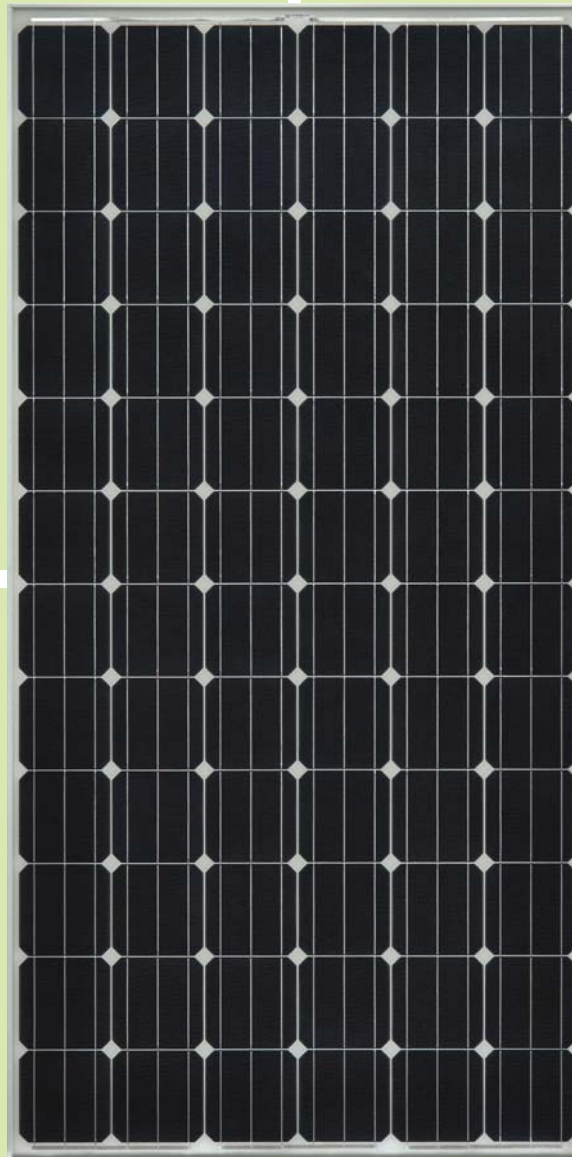

MUCHSAFER

ANDGREENER

About CNPV

CNPV Solar Power, is a leading integrated manufacturer of solar photovoltaic products, that designs, manufactures and supplies highly efficient and cost effective crystalline solar photovoltaic modules. Reliability & longevity are built into our world-class crystalline solar photovoltaic modules, which undergo rigorous internal tests and external certifications (IEC61215, IEC61730, UL and CE) to ensure peak performance and safety. For further information, please visit CNPV's website at <http://www.cnpv-power.com>, please contact us at marketing@cnpv-power.com.



Electrical Data	CNPV-305M	CNPV-310M	CNPV-315M	CNPV-320M	CNPV-325M
Peak Power Watts-Pmax (Wp)	305	310	315	320	325
Power Output Tolerance-Pmax (%)	0/+3	0/+3	0/+3	0/+3	0/+3
Maximum Power Voltage-Vmp (V)	36.12	36.50	36.85	37.25	37.60
Maximum Power Current-Imp (A)	8.45	8.50	8.55	8.60	8.65
Open Circuit Voltage-Voc (V)	45.70	45.80	45.90	46.00	46.10
Short Circuit Current-Isc(A)	8.95	9.00	9.10	9.15	9.20
Encapsulated Solar Cell Efficiency-ηc (%)	17.7	18.0	18.3	18.6	18.9
Module Efficiency-ηm (%)	15.6	15.9	16.2	16.4	16.7

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Mechanical Data	
Solar Cells	Mono Crystalline 156×156mm
Cells Configuration	72 cells (6×12)
Module Dimension	1965×992×35mm(77.36"×39.06"×1.38")
Weight	22Kg(48.5lb)
Glass	High transmission tempered glass with ARC
Frame	Anodized aluminium alloy type 6063T5; Color: Silver
J-box	Potted , IP67, 1000VDC, TÜV&UL certified with 3 schottky bypass diodes
Cables/Connector	4.0mm ² (12AWG), TÜV&UL certified/IP67, Type IV

Temperature Ratings	
Nominal Operating Cell Temperature (NOCT)	45±2°C(113±35.6°F)
Temperature Coefficient of Pmax	- 0.40%/°C(-0.22%/°F)
Temperature Coefficient of Voc	- 0.32%/°C(-0.18%/°F)
Temperature Coefficient of Isc	0.05%/°C(0.028%/°F)

Warranty	
10 years workmanship warranty	
25 years world's first true linear performance warranty	

(Please refer to CNPV product warranty for details)


Maximum Ratings	
Operational Temperature	-40~+85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	15A

Packaging Configuration	
Modules per box	30 pcs
Modules per 40 ft high cubic container	660 pcs
Modules per 20 ft container	250 pcs
Dimensions of Pallet (L×W×H)	2025×1145×1186mm
Gross Weight	710kg





I-V Characteristics at Different Irradiance & Temperature

I-V Curves of CNPV-315M at different irradiance
Cell Temp.25°C

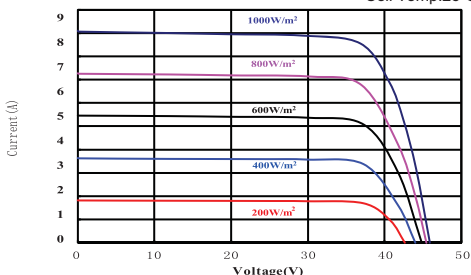


I-V Curves of CNPV-315M at different cell temperature
Irradiance: AM.1.5, 1KW/m²

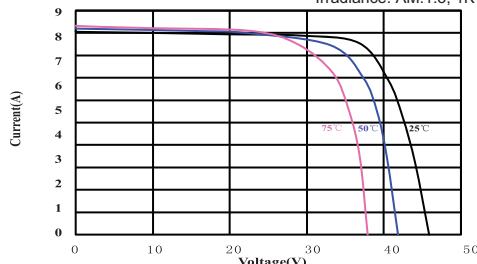

Module Efficiency Up to **16.7%** Wattage Up to **325W** Years Warranty **25**

Dimensional Characteristics

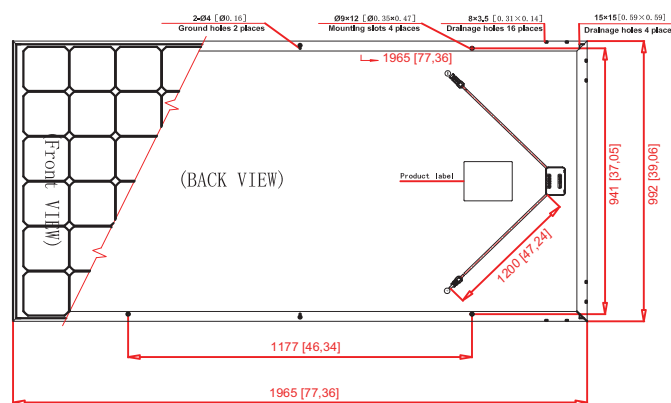

DISCLAIMER: specifications included in this datasheet are subject to change without previous notice from the company. In case of any conflicts/problems that may arise due to misinterpretation, prevailing conditions are the ones described in the original version (in English).

CNPV Dongying Solar Power Company Limited
E-mail:marketing@cnpv-power.com
Web:www.cnpv-power.com

Our Partners: